

AT9000 Advanced Transmitter

Flange type of Differential Pressure Transmitter

OVERVIEW

AT9000 Advanced Transmitter is a microprocessor-based smart transmitter that features high performance and excellent stability. Capable of measuring gas, liquid, and vapor, and liquid levels, it transmits 4 to 20 mA DC analog and digital signals according to the measured differential pressure.

It can also execute two-way communications between the CommPad (Handy Communicator) or HART[®] 375 communicator, thus facilitating self-diagnosis, range resetting, and automatic zero adjustment.



FEATURES

Excellent stability and high performance

- Long-term stability is proven in 500,000 installations worldwide.
- Unique characterization and composite semiconductor sensors realize excellent temperature and static pressure characteristics.

A diverse lineup

- A diverse flange lineup, ranging from small diameter 1.5 inch (40 mm) and 2 inches (50 mm) to 3 inches (80 mm), is available to meet user requirements.
- A wide variety of models, including those for standard differential pressure and high differential pressure, is available to meet user requirements.
- A wide variety of corrosion-resistant materials for wetted parts is also available.

Remote communication

- Two-way communication using digital output facilitates self-diagnosis, range resetting, automatic zero adjustment, and other operations.
- HART[®] protocol communication is available. (Option)

HART[®] is a registered trademark of the HART Communication Foundation.

APPLICATION**Petroleum / Petrochemical / Chemical**

For measuring pressures, liquid levels, and ordinary surface levels in tanks of all sizes.

Electric power / City gas / Other utilities

For measurement applications that require high degrees of stability and accuracy.

Pulp and paper

- For lines that need transmitters resistant to chemical liquids, corrosive fluids and the like.
- For measuring pressures, liquid levels, and boundary surface levels in tanks
- For measuring pressure, liquid levels, and boundary surface levels in tanks of all sizes.

Iron and steel / Nonferrous metal / Ceramics

For lines that require stable measurement under strictly controlled (temperature, humidity, etc.) conditions.

Machinery / Shipbuilding

For lines that require stable measurement under strictly controlled (temperature, humidity, etc.) conditions.

FUNCTIONAL SPECIFICATIONS**Type of protection**

NEMA3 and 4X
IEC IP67

FM Explosionproof and Dust Approvals

Explosionproof for Class I, Division 1, Groups A, B, C and D; Class I, Zone 1, AEx d IIC
Dust-Ignitionproof for Class II, III, Division 1, Groups E, F and G
 $T_5 -40^{\circ}\text{C} \leq T_{\text{amb}} \leq +85^{\circ}\text{C}$
Hazardous locations
Indoor / Outdoor Type 4X, IP67
Factory sealed, conduit seal not required for Division applications
Caution - Use supply wires suitable for 5°C above surrounding ambient

FM Explosion proof approval (draft, pending)

Explosionproof for Class I (Gas, steam), Division 1, Group A, B, C, D

Dust-ignition for Class II (Inflammable dust), Division 1, Group E, F, G

Suitable for Class III (inflammable fiber), Division 1


Nonincendive for Class I, Division 2, Group A, B, C, D

FM Intrinsically safe approval (draft, pending)

Intrinsically safe for Class I, II, III, Division 1, Group A, B, C, D, E, F, G


ATEX Flameproof approval (draft, pending)

Certificate number: INERIS99ATEX0010 X

 II 2 GD EExd IIC T6 at $-20 \leq T_{\text{amb}} \leq +60^{\circ}\text{C}$

ATEX Intrinsic safety (draft, pending)

Certificate number: KEMA03ATEX1225 X

 II 1 G EEx ia IIC T4 at $-20 \leq T_{\text{amb}} \leq +60^{\circ}\text{C}$

Electrical data: $U_i = 30\text{V}$
 $I_i = 100\text{mA}$
 $P_i = 1\text{W}$
 $C_i = 3\text{nF}$
 $L_i = 0.5\text{mH}$

SPECIAL CONDITIONS FOR SAFE USE (X)

Because the enclosure of the Smart Pressure Transmitter is made of aluminium, if it is mounted in an area where the use of category 1 G apparatus is required, it must be installed such, that, even in the event of rare incidents, ignition sources due to impact and friction sparks are excluded.

NEPSI Flameproof and Dust Certifications

Ex d IIC T6 DIP A21 $T_A 85^{\circ}\text{C}$ $T_{\text{process}}=80^{\circ}\text{C}$ $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +75^{\circ}\text{C}$

Ex d IIC T5 DIP A21 $T_A 100^{\circ}\text{C}$ $T_{\text{process}}=95^{\circ}\text{C}$ $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +80^{\circ}\text{C}$

Ex d IIC T4 DIP A21 $T_A 115^{\circ}\text{C}$ $T_{\text{process}}=110^{\circ}\text{C}$ $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +80^{\circ}\text{C}$

ENCLOSURE TYPE IP66/67

Certificate No. GYJ071268

NEPSI Intrinsic Safety Certification (draft, pending)

Ex ia IIC T4 $T_{\text{process}}=105^{\circ}\text{C}$ $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +60^{\circ}\text{C}$

Enclosure IP66 / 67

Electrical Parameters: $U_i=30\text{V}$, $I_i=100\text{mA}$, $P_i=1\text{W}$,

$C_i=13\text{nF}$, $L_i=0.5\text{mH}$

Certificate No. GYJ071269

NEPSI Type n Certification

Ex nL IIC T4 T_{process}=110°C -40°C ≤ T_{amb} ≤ +60°C
 Enclosure IP66 / 67
 Electrical Parameters: U_i=30V, I_i=100mA, P_i=1W,
 C_i=13nF, L_i=0.5mH
 Certificate No. GYJ071269

EMC Conformity

89/336/EEC, 92/31/EEC, 93/68/EEC Electromagnetic
 Compatibility (EMC) Directive

Measuring span / Setting range / Working pressure range

	Measuring span	Setting range	Working pressure range
GTX 35F	2.5 to 100kPa {250 to 10160 mmH ₂ O}	-100 to 100kPa {-10160 to 10160 mmH ₂ O}	Up to flange rating (for negative pressures, see Figure 1 and Figure 2)
GTX 60F	35 to 3500kPa {0.35 to 35 kgf/cm ² }	-100 to 3500kPa {-1~35 kgf/cm ² }	

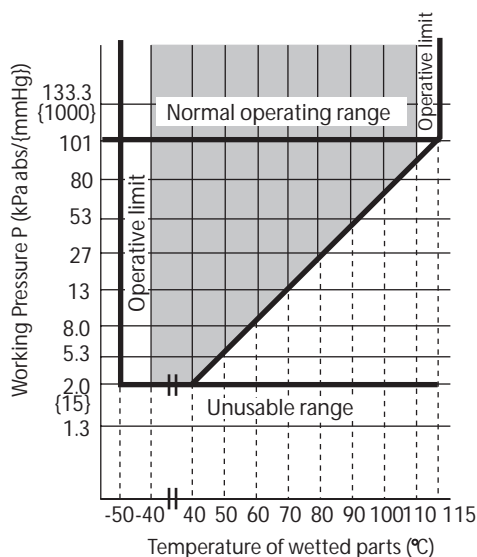


Figure 1 Working pressure and temperature of wetted parts section

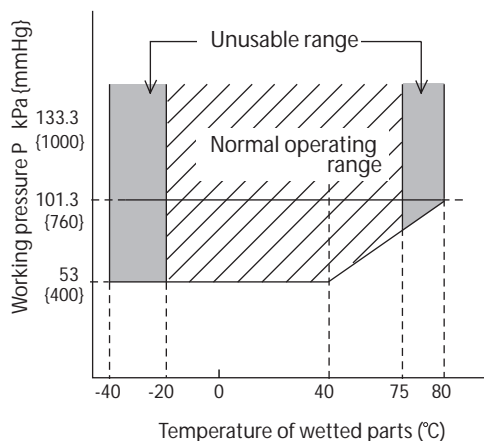


Figure 2 Working pressure and temperature of wetted parts section (for oxygen and chlorine service)

Supply voltage and load resistance

17.9 to 42V DC. A load resistance of 250 Ω or more is necessary between loops. See Figure 3.

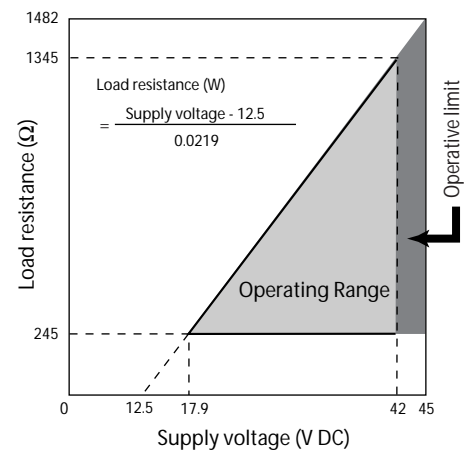


Figure 3 Supply voltage vs. load resistance characteristics

Note) For communication with HART communicator, a load resistance of 250 Ω or more is necessary.

Output

Analog output (4 to 20 mA DC) with DE protocol
 Analog output (4 to 20 mA DC) with HART protocol

Output signal

3.6 to 21.6 mA
 3.8 to 20.5 mA (NAMUR NE43 compliant)

Failure Alarm

Upper: 21.6 mA or more
 Lower: 3.6 mA or less

Ambient temperature limits

Normal operating range

-30 to 75°C for general purpose models
 -10 to 75°C for oxygen and chlorine models
 -25 to 80°C for models with digital indicators

Operative limits

-50 to 80°C for general purpose models
 -40 to 80°C for oxygen and chlorine models
 -30 to 85°C for models with digital indicators

Temperature ranges wetted parts

Normal operating range

-40 to 110°C for general purpose models
 -20 to 75°C for oxygen and chlorine models

Operative limits

-50 to 115°C for general purpose models
 -40 to 80°C for oxygen and chlorine models

Ambient humidity limits

5 to 100% RH

Stability against supply voltage change

± 0.005% FS/V

Dead time

Max: 0.4 sec.

Damping time

Selectable from 0 to 32 sec. in ten stages

Lightning protection

Applicable Standards; IEC 61000-4-5

Peak value of current surge(80/20 μ sec.): 6000A

Indicator

The digital LCD indicator (optional) indicates engineering units and can be set freely between -99999 and 99999 (5 digits). For meter calibration, specify the following items when placing your order.

- Meter calibration range
- Meter calibration unit
- Linear / Square-root for meter indication.

Various kinds of data can be set using the CommPad or the HART[®]375 communicator.

Bolts and nuts materials (for fastening meter body cover)

Carbon steel (SNB7), 304 SST, 630 SST

Paint**Standard**

Corrosion-resistant paint (Baked acrylic paint)

Corrosion-proof finish

Corrosion-proof paint (Baked epoxy paint), fungus-proof finish

Corrosion-resistant finish (silver paint)

Transmitter case is coated with silver paint in addition to the above corrosion-resistant finish.

OPTIONAL SPECIFICATIONS**FEP protective film**

Use FEP protective films when corrosive fluids are used or to avoid metal ions contact.

Working temperature range

0 to 110°C

Working pressure range

Atmospheric pressure to flange rating
(up to JIS10K, ANSI / JPI 150)
(Not usable under negative pressure)

Oil free finish

The transmitter is shipped with oil-free wetted parts.

External zero/span adjustment function

The transmitter can be easily zero/span adjusted in the field.

Elbow

This is an adaptor for changing the electrical conduit connection port from the horizontal to the vertical direction, if

required by wiring conditions in the field. One or two elbows may be used as needed.

Conformance to SI units

We deliver transmitters set to any SI units as specified.

PHYSICAL SPECIFICATIONS**Materials****Fill fluid**

Silicone oil for general purpose models

Fluorine oil for oxygen and chlorine models

Center body

316 SST

Transmitter case

Aluminum alloy

Meter body cover

SCS14A (equivalent to 316 SST) or 316 SST

For Wetted parts**Adapter flange (option)**

SCS14A (equivalent to 316 SST)

Center body

316 SST (316L SST for diaphragm only)

ASTM B575 (Hastelloy C-276 equivalent), Tantalum,

316L SST

Vents and plugs

316 SST

Gaskets

FEP

Flange materials

304 SST, 316 SST, 316L SST

Weight

Approx. 5.9 kg (in case of ANSI 150# - 1-1/2 inches flange)

INSTALLATION**Electrical connection**

1/2NPT internal thread, M20 internal thread.

Grounding

Resistance 100 Ω max

Mounting

Direct mounting on the process side

Process connection**Measured pressure (liquid side)****Flush diaphragm**

ANSI 150, 300 and 600:1.5 / 2 / 3 inches (RF) equivalent

Extended diaphragm

ANSI 150, 300 and 600:2 / 3 / 4 inches (RF) equivalent

Standard pressure side

PERFORMANCE SPECIFICATIONS

Max working pressure

- Note) 1. Max. working pressure depends on flange rating, flange materials and operating temperature. Please refer to the following data. Operating range of temperature depends on specification of transmitters.
- Note) 2. In case of flange type (GTX60F) and remote sealed type (GTX60U), max working pressure depends on the smaller value of either 1.5 MPa or following data.
- Note) 3. In case of remote sealed type (GTX71U), max working pressure depends on the smaller value of either 10 MPa or following data.

	JIS	JPI/ANSI
304 SST	<p>The graph shows the maximum working pressure in MPa for 304 SST under JIS standards. The y-axis ranges from 0.0 to 12.0 MPa, and the x-axis ranges from -50 to 300 °C. Five curves are shown for different ratings: 63K (highest), 40K, 30K, 20K, and 10K (lowest). All curves show a constant pressure up to approximately 50 °C, followed by a decrease as temperature increases.</p>	<p>The graph shows the maximum working pressure in MPa for 304 SST under JPI/ANSI standards. The y-axis ranges from 0.0 to 12.0 MPa, and the x-axis ranges from -50 to 300 °C. Three curves are shown for different ratings: 600#, 300#, and 150#. All curves show a constant pressure up to approximately 50 °C, followed by a decrease as temperature increases.</p>
316 SST	<p>The graph shows the maximum working pressure in MPa for 316 SST under JIS standards. The y-axis ranges from 0.0 to 12.0 MPa, and the x-axis ranges from -50 to 300 °C. Five curves are shown for different ratings: 63K, 40K, 30K, 20K, and 10K. All curves show a constant pressure up to approximately 50 °C, followed by a decrease as temperature increases.</p>	<p>The graph shows the maximum working pressure in MPa for 316 SST under JPI/ANSI standards. The y-axis ranges from 0.0 to 12.0 MPa, and the x-axis ranges from -50 to 300 °C. Three curves are shown for different ratings: 600#, 300#, and 150#. All curves show a constant pressure up to approximately 50 °C, followed by a decrease as temperature increases.</p>
316L SST	<p>The graph shows the maximum working pressure in MPa for 316L SST under JIS standards. The y-axis ranges from 0.0 to 12.0 MPa, and the x-axis ranges from -50 to 300 °C. Five curves are shown for different ratings: 63K, 40K, 30K, 20K, and 10K. All curves show a constant pressure up to approximately 50 °C, followed by a decrease as temperature increases.</p>	<p>The graph shows the maximum working pressure in MPa for 316L SST under JPI/ANSI standards. The y-axis ranges from 0.0 to 12.0 MPa, and the x-axis ranges from -50 to 300 °C. Three curves are shown for different ratings: 600#, 300#, and 150#. All curves show a constant pressure up to approximately 50 °C, followed by a decrease as temperature increases.</p>

PERFORMANCE SPECIFICATIONS**Accuracy**

Shown for each item are the percentage ratio for χ (kPa), which is the greatest value of either the upper range value (URV)^{*1}, the lower range value (LRV)^{*2} or the span.

Model GTX35F

(Material of Wetted Parts at Flange Side: Diaphragm; 316L SST Others; 316 SST, Material of Wetted parts at reference side: Diaphragm; 316L SST, Others; 316 SST)

Accuracy	Linear output:	$\pm 0.2\%$	(For $\chi \geq 12.5$ kPa {1250 mmH ₂ O})
		$\pm\left(0.05 + 0.15 \times \frac{12.5}{\chi}\right) \%$	(For $\chi < 12.5$ kPa {1250 mmH ₂ O})
Ambient Temperature effect (Shift from the set range) Change of 30°C (Range from -5 to 55°C)	Combined shift: (including zero and span shifts)	$\pm 1.45\%$	(For $\chi \geq 12.5$ kPa {1250 mmH ₂ O})
		$\pm\left(0.35 + 1.1 \times \frac{12.5}{\chi}\right) \%$	(For $\chi < 12.5$ kPa {1250 mmH ₂ O})
Static pressure effect (Shift in respect to setting range) Change of 7 MPa {70 kgf/cm²}	Zero shift:	$\pm 0.7\%$	(For $\chi \geq 25$ kPa {2500 mmH ₂ O})
		$\pm\left(0.7 \times \frac{25}{\chi}\right) \%$	(For $\chi < 25$ kPa {2500 mmH ₂ O})
	Combined shift: (including zero and span shifts)	$\pm 1.0\%$	(For $\chi \geq 25$ kPa {2500 mmH ₂ O})
		$\pm\left(1.0 \times \frac{25}{\chi}\right) \%$	(For $\chi < 25$ kPa {2500 mmH ₂ O})

Model GTX60F

(Material of Wetted Parts at Flange Side: Diaphragm; 316L SST Others; 316 SST, Material of Wetted parts at reference side: Diaphragm; 316L SST, Others; 316 SST)

Accuracy (*3)	Linear output:	$\pm 0.15\%$	(For $\chi \geq 350$ kPa {3.5 kgf/cm ² })
		$\pm\left(0.05 + 0.1 \times \frac{350}{\chi}\right) \%$	(For $\chi < 350$ kPa {3.5 kgf/cm ² })
Ambient Temperature effect (Shift from the set range) Change of 30°C (*3) (Range from -5 to 55°C)	Combined shift: (including zero and span shifts)	$\pm 0.75\%$	(For $\chi \geq 350$ kPa {3.5 kgf/cm ² })
		$\pm\left(0.35 + 0.4 \times \frac{350}{\chi}\right) \%$	(For $\chi < 350$ kPa {3.5 kgf/cm ² })
Static pressure effect (Shift in respect to setting range) (*3) Change of 7 MPa {70 kgf/cm²}	Zero shift:	$\pm\left(0.03 + 7.5 \times \frac{350}{\chi}\right) \%$	
	Combined shift: (including zero and span shifts)	$\pm 9.00\%$	(For $\chi \geq 350$ kPa {3.5 kgf/cm ² })
		$\pm\left(1.5 + 7.5 \times \frac{350}{\chi}\right) \%$	(For $\chi < 350$ kPa {3.5 kgf/cm ² })

Note) *1) URV denotes the process value for 100% (20 mA DC) output.

*2) LRV denotes the process value for 0% (4 mA DC) output.

*3) Within a range of $URV \geq 0$ and $LRV \geq 0$.

Model GTX35F

(Material of Wetted Parts at Flange Side: Diaphragm; ASTM B575 (Hastelloy C-276 equivalent), Tantalum, 316L SST Others; ASTM B575 (Hastelloy C-276 equivalent), Tantalum, 316L SST, Material of Wetted parts at reference side: Diaphragm; 316L SST, Others; 316 SST)

Accuracy	Linear output:	$\pm 0.4\%$	(For $\chi \geq 12.5$ kPa {1250 mmH ₂ O})
		$\pm\left(0.25 + 0.15 \times \frac{12.5}{\chi}\right)\%$	(For $\chi < 12.5$ kPa {1250 mmH ₂ O})
Ambient Temperature effect (Shift from the set range) Change of 30°C (Range from -5 to 55°C)	Combined shift: (including zero and span shifts)	$\pm\left(0.6 + 2.4 \times \frac{25}{\chi}\right)\%$	
Static pressure effect (Shift in respect to setting range) Change of 7 MPa {70 kgf/cm²}	Zero shift:	$\pm 2.0\%$	(For $\chi \geq 25$ kPa {2500 mmH ₂ O})
		$\pm\left(2.0 \times \frac{25}{\chi}\right)\%$	(For $\chi < 25$ kPa {2500 mmH ₂ O})
	Combined shift: (including zero and span shifts)	$\pm 2.5\%$	(For $\chi \geq 25$ kPa {2500 mmH ₂ O})
		$\pm\left(2.5 \times \frac{25}{\chi}\right)\%$	(For $\chi < 25$ kPa {2500 mmH ₂ O})

Model GTX60F

(Material of Wetted Parts at Flange Side: Diaphragm; ASTM B575 (Hastelloy C-276 equivalent), Tantalum, 316L SST Others; ASTM B575 (Hastelloy C-276 equivalent), Tantalum, 316L SST, Material of Wetted parts at reference side: Diaphragm; 316L SST, Others; 316 SST)

Accuracy (*3)	Linear output:	$\pm 0.3\%$	(For $\chi \geq 350$ kPa {3.5 kgf/cm ² })
		$\pm\left(0.15 + 0.15 \times \frac{350}{\chi}\right)\%$	(For $\chi < 350$ kPa {3.5 kgf/cm ² })
Ambient Temperature effect (Shift from the set range) Change of 30°C (*3) (Range from -5 to 55°C)	Combined shift: (including zero and span shifts)	$\pm 1.0\%$	(For $\chi \geq 350$ kPa {3.5 kgf/cm ² })
		$\pm\left(0.35 + 0.65 \times \frac{350}{\chi}\right)\%$	(For $\chi < 350$ kPa {3.5 kgf/cm ² })
Static pressure effect (Shift in respect to setting range) (*3)	Zero shift:	$\pm\left(0.03 + 7.5 \times \frac{350}{\chi}\right)\%$	
	Combined shift: (including zero and span shifts)	$\pm 9.0\%$	(For $\chi \geq 350$ kPa {3.5 kgf/cm ² })
		$\pm\left(1.5 + 7.5 \times \frac{350}{\chi}\right)\%$	(For $\chi < 350$ kPa {3.5 kgf/cm ² })

Note) *3) Within a range of URV ≥ 0 and LRV ≥ 0 .

MODEL SELECTION

Model GTX35F(Flange type for standard differential pressure)

Model GTX60F(Flange type for high differential pressure)

Model No.:GTX_ _F-Selection I(I II III IV V VI VII)-Selection II(I II III IV V VI)-Option

Basic Model No.

Measuring span	2.5 to 100kPa (250 to 10,160mmH ₂ O)	GTX35F	Flush flange type 3 inches (80mm)
	35 to 3500kPa (0.35 to 35kgf/cm ²)	GTX60F	

Selection I

I	Output	4 to 20mA (SFN Communication)	A	
		4 to 20mA (HART Communication)	B	
II	Fill fluid	Regular type (Silicone oil)	A	
		For oxygen service (Fluorine oil)	H	
		For chlorine service (Fluorine oil) *1	J	
III	Material (Meterbody cover, Vent/ Drain plugs)	Meterbody cover		Vent / Drain plugs
		SCS14A		316 SST
IV	Material (centerbody)	Reference side		Wetted part of flange side
		316 SST		316 SST (Diaphragm: 316L SST)
		316 SST		ASTM B575
		316 SST		Tantalum
		316 SST		316L SST
V	Process connections of reference side	Rc 1/2, with adapter flange		A
		Rc 1/4, with adapter flange		B
		Rc 1/4, without adapter flange		C
		1/2 NPT internal thread, with adapter flange		D
		1/4 NPT internal thread, with adapter flange		E
		1/4 NPT internal thread, without adapter flange		F
		Open to atmosphere		H
VI	Process installation of reference side	No connection		X
		Vertical piping, top connection		A
		Vertical piping, bottom connection		B
VII	Flange rating	ANSI150		A1
		ANSI300		A2
		ANSI600		A3
VIII	Flange size	3in./80A		F
IX	Flange type	Flush type		A
X	Flange material/bolt and nut material	Flange		Bolt and nut
		304 SST		304 SST
		304 SST		Carbon steel
		316 SST		304 SST
		316 SST		Carbon steel
XI	Gasket face finish	None Standard JISRa3.2(12.5S)		A

Selection II

I	Electrical connection	1/2 NPT, Watertight		A
		M20, Watertight *2		B
II	Explosion proof	None		XX
		FM Explosionproof		F1
		FM Intrinsically safe		F2
		ATEX Explosionproof		A1
		ATEX Intrinsically safe		A2
		IECEX Explosionproof		E1
		IECEX Intrinsically safe		E2
		NEPSI Explosionproof		N1
		NEPSI Intrinsically safe		N2
NEPSI Type n		N5		
III	Built-in indicating smart meter	None		X
		With indicator		A
IV	Paint	Standard		X
		Corrosion-resistant		A
		Corrosion-proof		B
		Corrosion-resistant (Silver coating)		D
V	Burnout feature	UP Scale		A
		DOWN scale		B
VI	Mounting Bracket	None		X

Note) *1 In case code J is selected, code C "Tantalum" of Material (meterbody) should be selected.

*2 Not applicable for the combination with code F1 "FM Explosion proof" of Explosion proof.

Model GTX35F(Flange type for standard differential pressure)

Model GTX60F(Flange type for high differential pressure)

Model No.:GTX_ _F-Selection I(I II III IV V VI VII)-Selection II(I II III IV V VI)-Option

Basic Model No.

	Measuring span	2.5 to 100kPa (250 to 10,160mmH ₂ O)	GTX35F	Extended flange type 4 inches (100mm)
		35 to 3500kPa (0.35 to 35kgf/cm ²)	GTX60F	

Selection I

I	Output	4 to 20mA (SFN Communication)	A	
		4 to 20mA (HART Communication)	B	
II	Fill fluid	Regular type (Silicone oil)	A	
		For oxygen service (Fluorine oil)	H	
III	Material (Meter-body cover, Vent/ Drain plugs)	Meterbody cover	Vent / Drain plugs	
		SCS14A	316 SST	A
IV	Material (center-body)	Reference side	Wetted part of flange side	
		316 SST	316 SST (Diaphragm: 316L SST)	
		316 SST	316L SST	
V	Process connections of reference side	Rc 1/2, with adapter flange	A	
		Rc 1/4, with adapter flange	B	
		Rc 1/4, without adapter flange	C	
		1/2 NPT internal thread, with adapter flange	D	
		1/4 NPT internal thread, with adapter flange	E	
		1/4 NPT internal thread, without adapter flange	F	
		Open to atmosphere	H	
VI	Process installation of reference side	No connection	X	
		Vertical piping, top connection	A	
		Vertical piping, bottom connection	B	
VII	Flange rating	ANSI150	A1	
		ANSI300	A2	
		ANSI600	A3	
VIII	Flange size	4in./100A	G	
IX	Flange type	Extended Length 50mm	B	
		Extended Length 100mm	C	
		Extended Length 150mm	D	
		Extended Length 200mm	E	
		Extended Length 250mm	F	
		Extended Length 300mm	G	
X	Flange material/bolt and nut material	Flange	Bolt and nut	
		304 SST	304 SST	
		304 SST	Carbon steel	
		316 SST	304 SST	
		316 SST	Carbon steel	
XI	Gasket face finish	None Standard JISRa3.2(12.5S)	A	
Selection II				
I	Electrical connection	1/2 NPT, Watertight	A	
		M20, Watertight *1	B	
II	Explosion proof	None	XX	
		FM Explosionproof	F1	
		FM Intrinsically safe	F2	
		ATEX Explosionproof	A1	
		ATEX Intrinsically safe	A2	
		IECEX Explosionproof	E1	
		IECEX Intrinsically safe	E2	
		NEPSI Explosionproof	N1	
		NEPSI Intrinsically safe	N2	
		NEPSI Type n	N5	
III	Built-in indicating smart meter	None	X	
		With indicator	A	
IV	Paint	Standard	X	
		Corrosion-proof	B	
		Corrosion-resistant (Silver coating)	D	
V	Burnout feature	UP Scale	A	
		DOWN scale	B	
VI	Mounting Bracket	None	X	

Note) *1 Not applicable for the combination with code F1 "FM Explosion proof" of Explosion proof.

Model GTX35F(Flange type for standard differential pressure)

Model GTX60F(Flange type for high differential pressure)

Model No.:GTX_ _F-Selection I(I II III IV V VI VII)-Selection II(I II III IV V VI)-Option

Basic Model No.

	Measuring span	2.5 to 100kPa (250 to 10,160mmH ₂ O)	GTX35F	Flush flange type 2 inches (50mm),1.5inches (40mm)
		35 to 3500kPa (0.35 to 35kgf/cm ²)	GTX60F	

Selection I

I	Output	4 to 20mA (SFN Communication)	A						
		4 to 20mA (HART Communication)	B						
II	Fill fluid	Regular type (Silicone oil)	A						
		For oxygen service (Fluorine oil)	H						
		For chlorine service (Fluorine oil)	J						
III	Material (Meterbody cover, Vent/ Drain plugs)	Meterbody cover		Vent / Drain plugs					
		SCS14A		316 SST	A				
IV	Material (center-body)	Reference side	Wetted part of flange side						
		316 SST	316 SST (Diaphragm: 316L SST)			A			
		316 SST	ASTM B575 (Equivalent to Hastelloy C-276)			B			
		316 SST	Tantalum			C			
		316 SST	316L SST			D			
V	Process connections of reference side	Rc 1/2, with adapter flange			A				
		Rc 1/4, with adapter flange			B				
		Rc 1/4, without adapter flange			C				
		1/2 NPT internal thread, with adapter flange			D				
		1/4 NPT internal thread, with adapter flange			E				
		1/4 NPT internal thread, without adapter flange			F				
		Open to atmosphere			H				
VI	Process installation of reference side	No flange			X				
		Vertical piping, top connection			A				
		Vertical piping, bottom connection			B				
VII	Flange rating	ANSI150			A1				
		ANSI300			A2				
		ANSI600			A3				
VIII	Flange size	1.5in./40A *2*3			D				
		2in./50A			E				
IX	Flange type	Flash type			A				
X	Flange material/bolt and nut material	Flange	Bolt and nut						
		304 SST	304 SST		A				
		304 SST	Carbon steel		D				
		316 SST	304 SST		E				
		316 SST	Carbon steel		H				
XI	Gasket face finish	None Standard JISRa3.2(12.5S)			A				

Selection II

I	Electrical connection	1/2 NPT, Watertight	A						
		M20, Watertight *4	B						
II	Explosion proof	None							XX
		FM Explosionproof							F1
		FM Intrinsically safe							F2
		ATEX Explosionproof							A1
		ATEX Intrinsically safe							A2
		IECEX Explosionproof							E1
		IECEX Intrinsically safe							E2
		NEPSI Explosionproof							N1
		NEPSI Intrinsically safe							N2
		NEPSI Type n							N5
III	Built-in indicating smart meter	None							X
		With indicator							A
IV	Paint	Standard							X
		Corrosion-proof							B
		Corrosion-resistant (Silver coating)							D
V	Burnout feature	UP Scale							A
		DOWN scale							B
VI	Mounting Bracket	None							X

Note) *1 In case code J is selected, code C "Tantalum" of Material (meterbody) should be selected.
 *2 Not applicable for the combination with code J "For chlorine service" of Fill Fluid.
 *3 Not applicable for the combination with code C "Tantalum" of Material (meterbody).
 *4 Not applicable for the combination with code F1 "FM Explosion proof" of Explosion proof.

Model GTX35F(Flange type for standard differential pressure)

Model GTX60F(Flange type for high differential pressure)

Model No.:GTX__F-Selection I(I II III IV V VI VII)-Selection II(I II III IV V VI)-Option

Basic Model No.

	Measuring span	2.5 to 100kPa (250 to 10,160mmH20)	GTX35F	Extended flange type 3 inches (80mm), 2 inches(50m)
		35 to 3500kPa (0.35 to 35kgf/cm2)	GTX60F	

Selection I

I	Output	4 to 20mA (SFN Communication)	A
		4 to 20mA (HART Communication)	B
II	Fill fluid	Regular type (Silicone oil)	A
		For oxygen service (Fluorine oil)	H
III	Material (Meter-body cover, Vent/ Drain plugs)	Meterbody cover	Vent / Drain plugs
		SCS14A	
IV	Material (center-body)	Reference side	Wetted part of flange side
		316 SST	316 SST (Diaphragm: 316L SST)
		316 SST	316L SST
V	Process connections of reference side	Rc 1/2, with adapter flange	A
		Rc 1/4, with adapter flange	B
		Rc 1/4, without adapter flange	C
		1/2 NPT internal thread, with adapter flange	D
		1/4 NPT internal thread, with adapter flange	E
		1/4 NPT internal thread, without adapter flange	F
		Open to atmosphere	H
VI	Process installation of reference side	No flange	X
		Vertical piping, top connection	A
		Vertical piping, bottom connection	B
VII	Flange rating	ANSI150	A1
		ANSI300	A2
		ANSI600	A3
VIII	Flange size	2in./50A	E
		3in./80A	F
IX	Flange type	Extended Length 50mm	B
		Extended Length 100mm	C
		Extended Length 150mm	D
X	Flange material/bolt and nut material	Flange	Bolt and nut
		304 SST	304 SST
		304 SST	Carbon steel
		316 SST	304 SST
		316 SST	Carbon steel
X I	Gasket face finish	None Standard JISRa3.2(12.5S)	A

Selection II

I	Electrical connection	1/2 NPT, Watertight	A
		M20, Watertight *1	B
II	Explosion proof	None	XX
		FM Explosionproof	F1
		FM Intrinsically safe	F2
		ATEX Explosionproof	A1
		ATEX Intrinsically safe	A2
		IECEX Explosionproof	E1
		IECEX Intrinsically safe	E2
		NEPSI Explosionproof	N1
		NEPSI Intrinsically safe	N2
NEPSI Type n	N5		
III	Built-in indicating smart meter	None	X
		With indicator	A
IV	Paint	Standard	X
		Corrosion-proof	B
		Corrosion-resistant (Silver coating)	D
V	Burnout feature	UP Scale	A
		DOWN scale	B
VI	Mounting Bracket	None	X

Note) *1 Not applicable for the combination with code F1 "FM Explosion proof" of Explosion proof.

Model No.:GTX__D-Selection I(I II III IV V VI VII)-Selection II(I II III IV V VI)-Option


Options II	XX	No options
	A2	External Zero adjustment *11
	G1	One elbow (left) *6*7*10
	G2	One elbow (right) *6*7*10
	G3	2 elbows *6*7*8*10
	G4	Long vent/drain plugs
	K1	Oil and water free finish
	K3	Oil free finish *4
	L1	Au Plating Diaphragm *15
	M5	0.1mm thickness diaphragm *12*13
	N1	FEP protective film *14
	Q1	Safety Transmitter *5
	Q2	NAMUR NE43 Compliant Output sign limits:3.8 to 20.5mA (Output 21.6mA/selected upper limit, 3.6mA/selected lower limit)
	Q7	Alarm Output (contact output)
	R1	Custom calibration
	T1	Test report
	T2	Mill certificate
	T4	Traceability certificate
	T5	NACE certificate *9
	W1	Non SI Unit

- Note) *4 No need to select when Fill Fluid code H, or J is selected.
 *5 Not applicable for the combination with code A2, or Q7 of Option.
 *6 Not applicable for the combination with code A, or B of Process installation.
 *7 Not applicable for the combination with code F1 "FM Explosion proof" of Explosion proof.
 *8 Not applicable for any Explosion proof. Please select code XX "None" of Explosion proof.
 *9 Applicable for "ASTM B575", code B of Material (center body).
 *10 Not applicable for the combination with code B "M20 watertight" of Electrical connection.
 *11 Not applicable for the combination with code X "None" of Indicator. Please select "With indicator".
 *12 0.1 mm thickness diaphragm option is only available for Material of Wetted parts: "316 SST" and "316L SST".
 *13 0.1 mm thickness diaphragm option is only available for 4inches Extended Flange or 3inches Flush Flange.
 *14 Not applicable for the combination with Extended Flange Type.
 *15 Not applicable for the combination with "Tantalum" of Material (center body).

DIMENSIONS

Model GTX35F/60F

(Unit : mm)

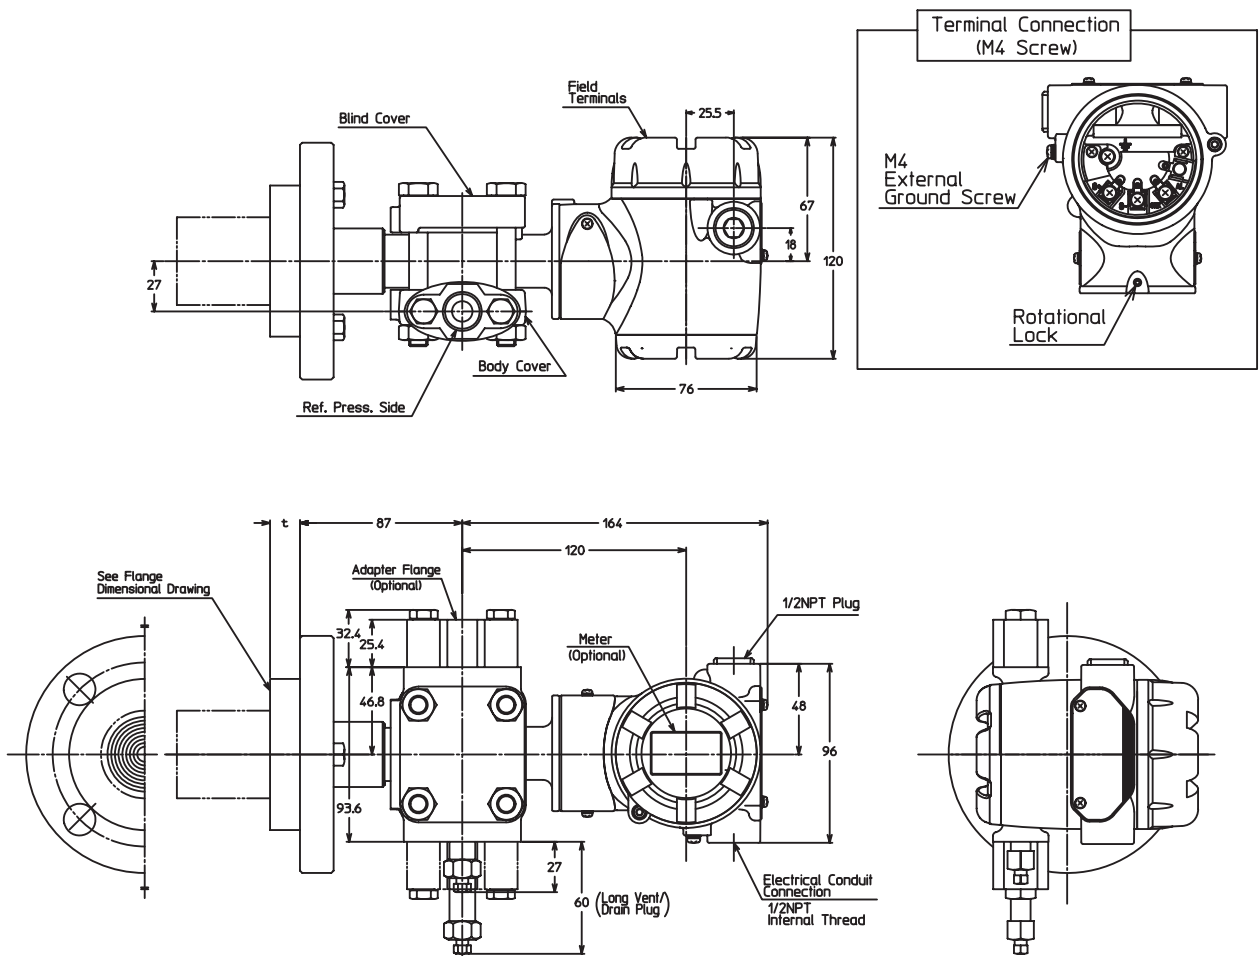




- Note) 1) For the process pipe connection on the standard pressure side, choose either the upward or downward directions. When changing the connection, replace the adapter flange and the vent/drain plugs.
 2) Select a gasket that will not contact the diaphragm after it is tightened.

Model GTX35F/60F


Process connection of reference side: open to atmosphere

(Unit : mm)

Process Connection :

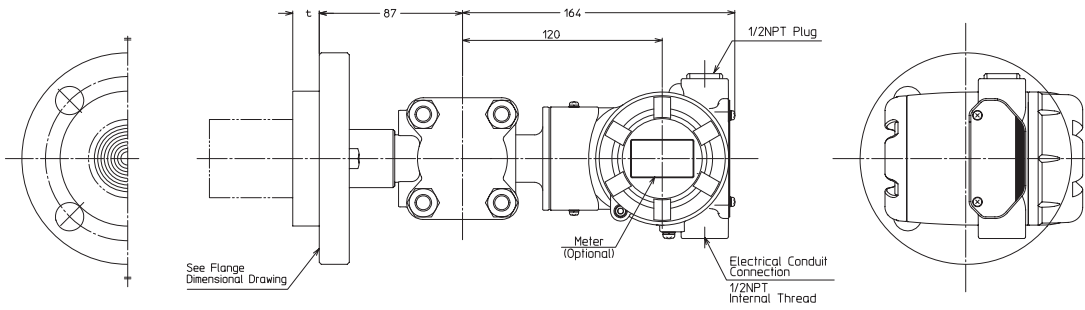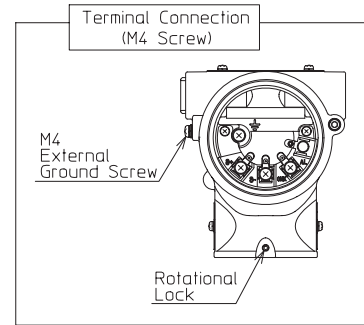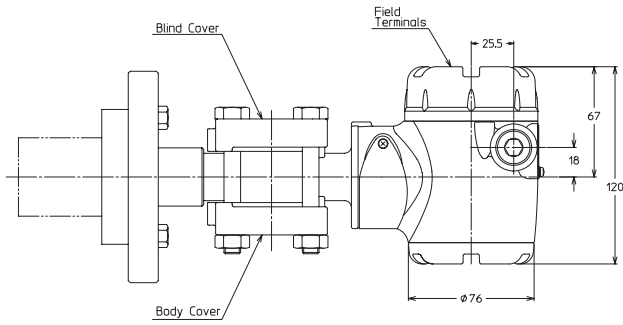


Flash diaphragm flange

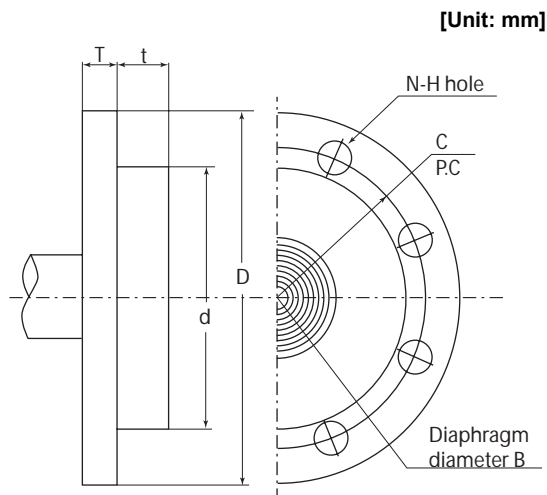

Material of wetted parts	B
316 SST	40
316L SST	
ASTM B575 (Hastelloy C-276 equivalent)	43
Tantalum	62

Rating	Flange rating	D	T	C	N	H	d	t
1.5 inch/ 40 mm	JIS 10K - 40 mm	140	18	105	4	19	81	16
	JIS 20K - 40 mm	140	18	105	4	19		
	JIS 30K - 40 mm	160	25	120	4	23		
	ANSI 150 - 1.5 inch	127	18	98.6	4	16		
	ANSI 300 - 1.5 inch	155	25	114.3	4	22		
	ANSI 600 - 1.5 inch	155	32	114.3	4	22		
	JPI 150 - 1.5 inch	127	18	98.6	4	16		
	JPI 300 - 1.5 inch	155	25	114.3	4	22		
2 inches/ 50 mm	JIS 10K - 50 mm	155	16	120	4	19	99	19
	JIS 20K - 50 mm	155	18	120	8	19		
	JIS 30K - 50 mm	165	22	130	8	19		
	ANSI 150 - 2 inches	152	19.5	120.6	4	19		
	ANSI 300 - 2 inches	165	22.5	127	8	19		
	ANSI 600 - 2 inches	165	25.5	127	8	19		
	JPI 150 - 2 inches	152	19.5	120.6	4	19		
	JPI 300 - 2 inches	165	22.5	127	8	19		
3 inches/ 80 mm	JIS 10K - 80 mm	185	18	150	8	19	129.5	22
	JIS 20K - 80 mm	200	22	160	8	23		
	JIS 30K - 80 mm	210	28	170	8	23		
	ANSI 150 - 3 inches	190	24	152.4	4	19		
	ANSI 300 - 3 inches	210	28.5	168.1	8	22		
	ANSI 600 - 3 inches	210	32	168.1	8	22		
	JPI 150 - 3 inches	190	24	152.4	4	19		
	JPI 300 - 3 inches	210	28.5	168.1	8	22		
JPI 600 - 3 inches	210	32	168.1	8	22			

External diaphragm flange

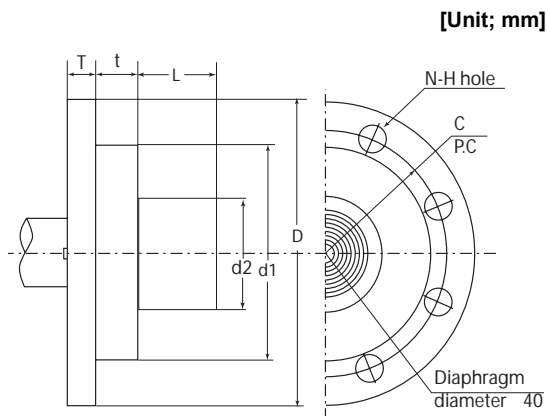

Rating	Flange rating	D	T	C	N	H	d1	d2	t	B	L
2 inches/ 50 mm	JIS 10K - 50 mm	155	16	120	4	19	99	47±1	19		50
	JIS 20K - 50 mm	155	18	120	8	19					100
	JIS 30K - 50 mm	165	22	130	8	19					150
	ANSI 150 - 2 inches	152	19.5	120.6	4	19					200
	ANSI 300 - 2 inches	165	22.5	127	8	19					250
	ANSI 600 - 2 inches	165	25.5	127	8	19					300
	JPI 150 - 2 inches	152	19.5	120.6	4	19					
	JPI 300 - 2 inches	165	22.5	127	8	19					
	JPI 600 - 2 inches	165	25.5	127	8	19					
3 inches/ 80 mm	JIS 10K - 80 mm	185	18	150	8	19	129.5	69±1	22	40	
	JIS 20K - 80 mm	200	22	160	8	23					
	JIS 30K - 80 mm	210	28	170	8	23					
	ANSI 150 - 3 inches	190	24	152.4	4	19					
	ANSI 300 - 3 inches	210	28.5	168.1	8	22					
	ANSI 600 - 3 inches	210	32	168.1	8	22					
	JPI 150 - 3 inches	190	24	152.4	4	19					
	JPI 300 - 3 inches	210	28.5	168.1	8	22					
4 inches/ 100 mm	JIS 10K - 100 mm	210	18	175	8	19	157	95±1	23		
	JIS 20K - 100 mm	225	24	185	8	23					
	JIS 30K - 100 mm	240	32	195	8	25					
	ANSI 150 - 4 inches	229	24	190.5	8	19					
	ANSI 300 - 4 inches	254	32	200.2	8	22					
	JPI 150 - 4 inches	229	24	190.5	8	19					
JPI 300 - 4 inches	254	32	200.2	8	22						

Specifications are subject to change without notice.

azbil

Yamatake Corporation
Advanced Automation Company

1-12-2 Kawana, Fujisawa-shi
Kanagawa-ken 251-8522 Japan

URL:<http://www.azbil.com>

No part of this publication may be reproduced or duplicated without the prior written permission of Yamatake Corporation.

May 2008–Y/Y
July 2008 (Rev.2)–Y/Y